

ASSEMBLY INSTRUCTIONS




Package contents:

- Aluminum casing (1)
- Plastic container (2) with installed wheels, overflow (4), watering tunnel and safety overflow plugs
- Removable bottom with installed baskets (9)
- Watermark (3)
- Tunnel cover grid (7)
- Removable reinforcement (6) (only for type BLOCK 80/40/50, 80/40/75, 120/40/50, 120/40/75)
- Textile wicks (5)
- Drainage mixture inFlorita Grit (8)

What you will need for assembly: flathead screwdriver, hammer

Assembly procedure:

- 1/ Remove the plastic container and accessories from the box.
- 2/ a/ When using the flowerpot indoors, leave it screwed in place the water overflow cover⁽⁴⁾ on the underside of the plastic bottom of the container.
b/ When used outdoors in case you don't want to divert the excess draining water from the flower pot to drain channel (e.g. lawn), unscrew the cap water overflow⁽⁴⁾ on the underside of the plastic bottom container to allow excess water to drain freely.
c/ When used outdoors, if you want to drain excess water from the flower pot into a drain channel (e.g. terrace), unscrew the overflow cap⁽⁴⁾ on the underside of the plastic container and screw on the elbow with the drain hose (not included in the package - additional product range) so that excess water can drain freely through the hose to the chosen location.

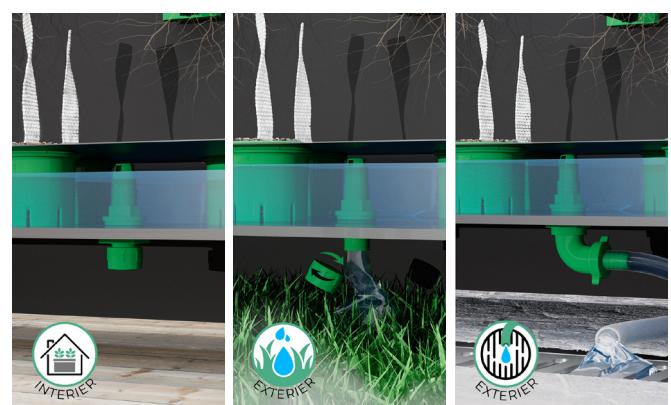

2/a

2/b

2/c



3/a

3/b

3/ a/ If you did not purchase a set of extra drainage cups to raise the bottom of the flower pot, place the removable bottom with installed cups⁽⁹⁾ in a plastic container.

b/ If you have purchased a set of baskets to raise the bottom of the flower pot, take the removable bottom with the installed basic baskets⁽⁹⁾, place it on a clean flat surface with the basket bottoms facing up. Using a hammer and a gentle blow, punch out the perforated bottoms for all installed baskets. Do not break them off with your hand, there is a risk of injury. Once you have punched out all the bottoms, place one basket from the purchased set on each basket in the removable bottom so that there are always two on top of each other. Place the completed removable bottom in a plastic container.

4/ Put on the watering tunnel cover grid.⁽⁷⁾

5/ When using the planter outdoors, use a flat screwdriver to unscrew the two plugs of the safety overflow holes on the outside of the plastic container in the watering tunnel area. When using the planter indoors, leave the plugs in place. When using the "inFlorita" planter outdoors, we recommend draining all water in the winter through a special hole (WINTER EXTERIOR) at the bottom of the planter. This will prevent the water from freezing and damaging the planted plant.

6/ Insert a textile wick⁽⁶⁾ into each basket and cover it with the drainage mixture inFlorita Grit so that the basket is completely filled with the drainage mixture and the wick points vertically upwards.

7/ If the plastic container is equipped on the inside with holders for the reinforcement/s, insert the reinforcement/s.⁽⁶⁾

8/ Before you start pouring soil or substrate into the flower pot, move the plastic container to its location and secure it against movement. You can use the inFlorita Brake (not included - optional).

9/ Place the aluminum cover on the plastic container.⁽¹⁾

10/ Fill in the soil/substrate and plant the plants of your choice. When filling in, try to keep the textile wicks in a vertical position to maintain the ideal function of supplying the as yet undeveloped root system of the planted plants with water from the reservoir at the bottom of the pot.

11/ Insert the watermark⁽³⁾ into the hole in the tunnel cover grid⁽⁷⁾ for watering.



5/



6/



8/

Cleaning:

Wipe only with a damp cloth and a mild soap solution. Do not use any abrasive or chemical cleaners. Wipe dry with a clean cloth.

We would like to thank you for purchasing our inFlorita flower pot and we believe that our product will make you happy.

The inFlorita Team

